



## ABOUT US

CSC Steel (CSCM) is a Taiwanese-owned steel producer that specialises in galvanised steel products and colour-coated steel products for the building material industry under our proprietary brand names, realzinc™ and realcolor®. We also produce pickled & oiled steel coils and cold-rolled steel coils.

Incorporated in Malaysia, we have been listed on the Main Board of Bursa Malaysia since 2004. By leveraging on the management experience and technological expertise of our major shareholder, China Steel Corporation of Taiwan, we are committed to providing our customers with high-quality products and value-added services.

For product identification and originality, please check the reverse side of the coil for the following branding text.

realcolor (R) CAHAYA made by CSC Steel YYYYMMDD TTTT

RELIABLE | EXPERIENCED | ACCOUNTABLE | LONG LASTING



EXCELLENT PERFORMANCE



DURABILITY



RECYCLABLE



COATING



WARRANTY



CSC STEEL HOLDINGS BERHAD  
CSC STEEL SDN BHD  
180, Kawasan Industri Ayer Keroh, Ayer Keroh, 75450 Melaka, Malaysia.  
T: 606 231 0169 (Hunting) F: 606 231 0167/9166 E: sales@cscmalaysia.com (Sales)




Code: PB.PCC 10/2019



# VIBRANT PROTECTION

Stylish pre-painted roofing and cladding solutions to protect your home against the environment

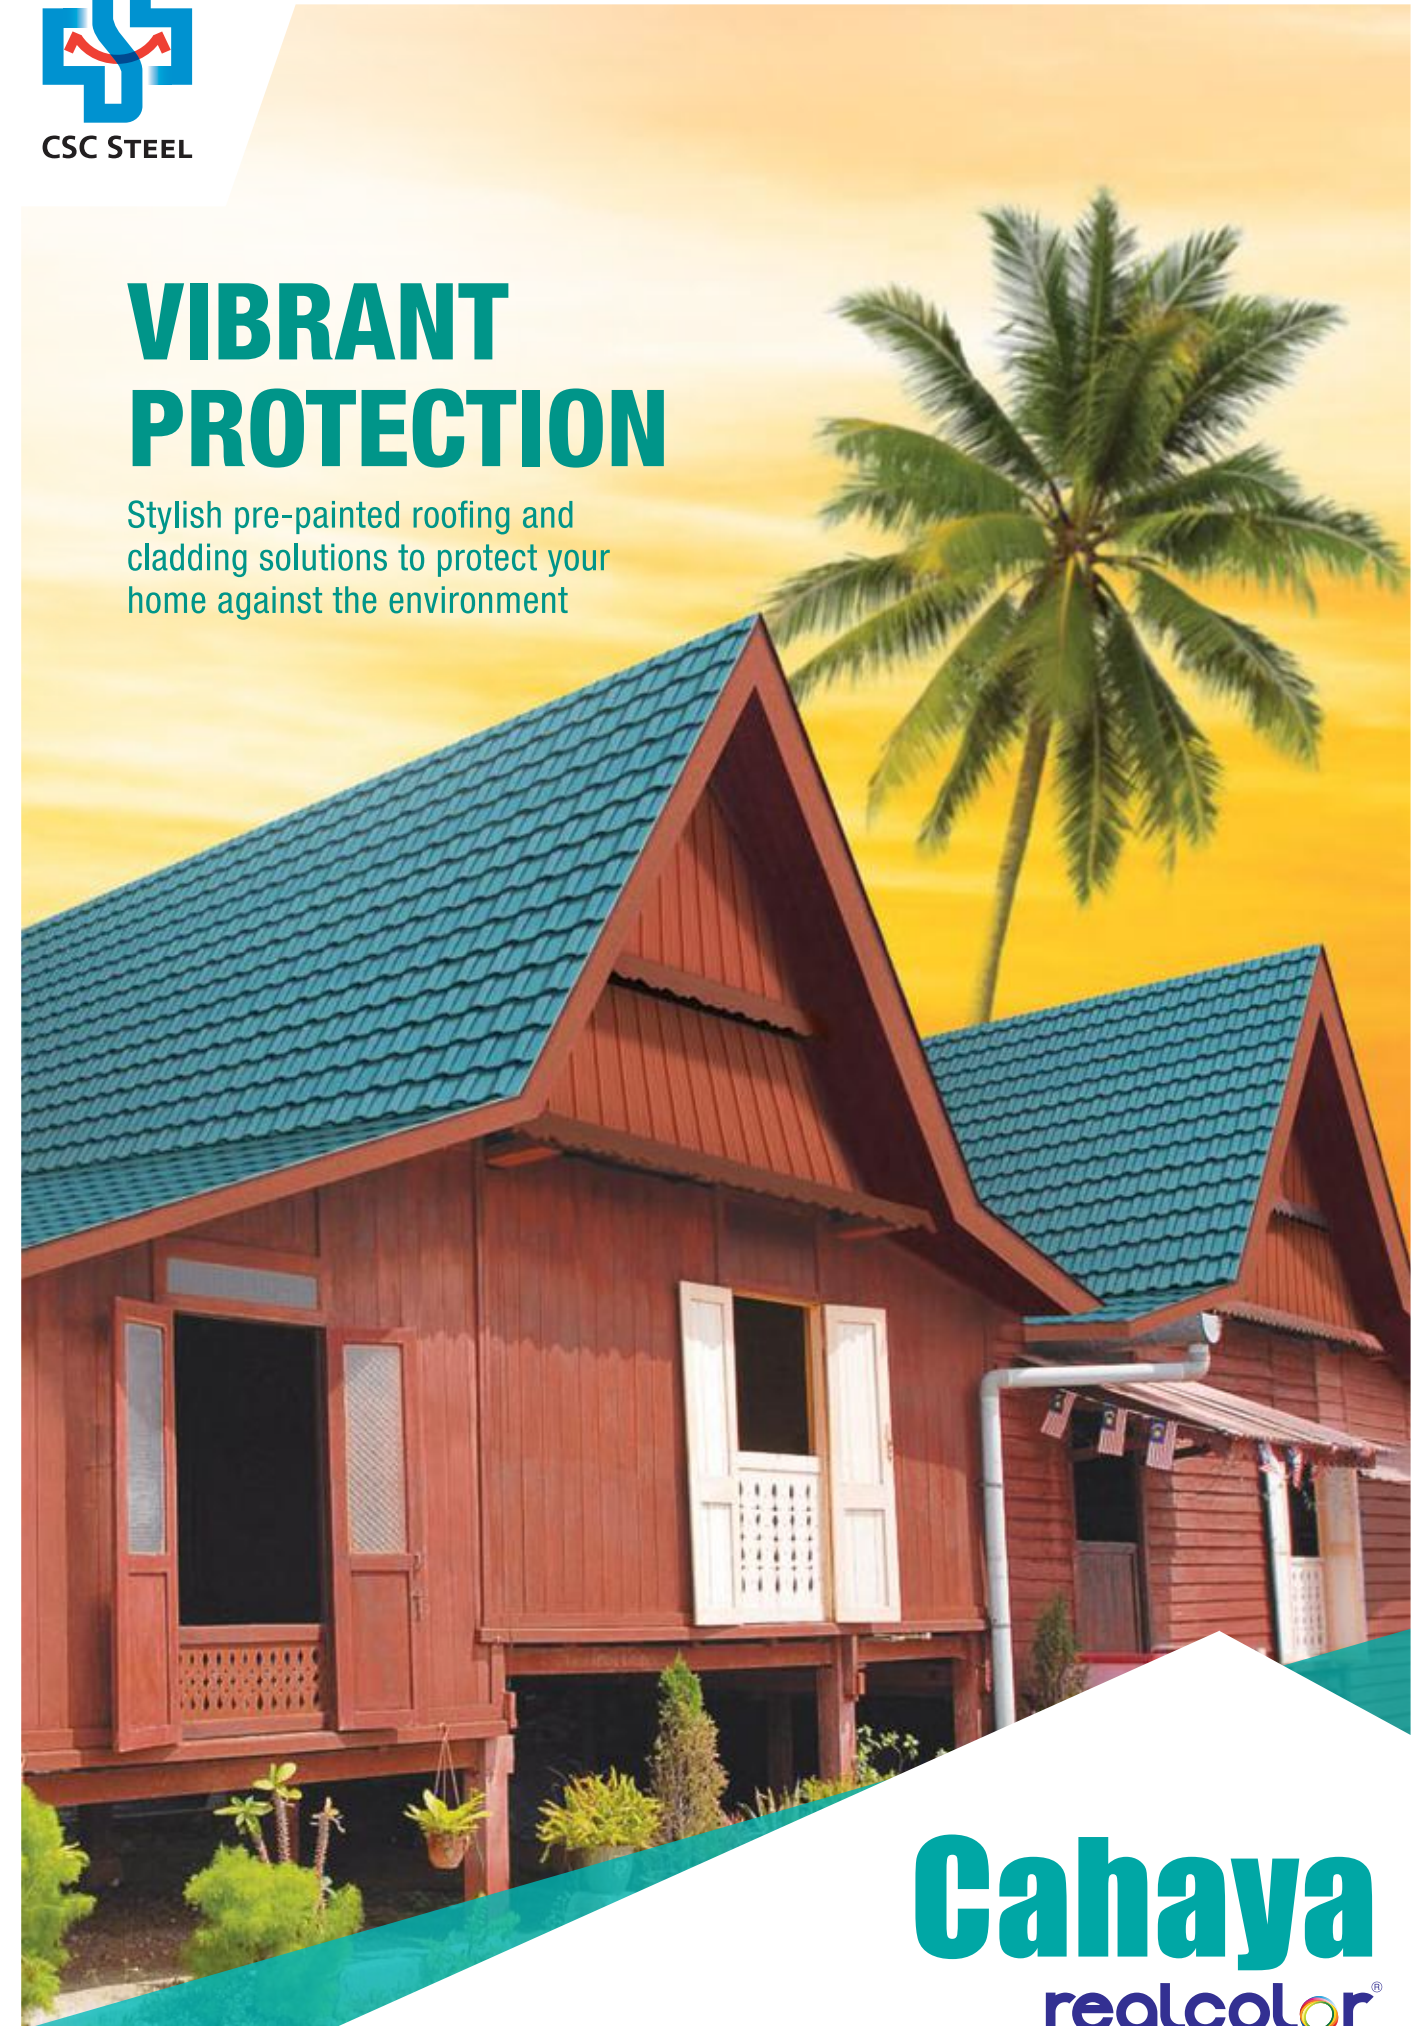

**Cahaya**  
realcolor®

# REALCOLOR® CAHAYA

Realcolor Cahaya provides colour selections for roofing and cladding applications with excellent surface hardness, flexibility and vibrant protection. Stylish pre-painted roofing and cladding solutions protect your home against the environment.

## ADVANTAGES


- Corrosion resistance
- Colour options
- Durability
- Good formability
- Affordable
- Warranty up to 5 years against perforation



## END USAGES

Generally used in architectural structures such as roofing, wall cladding, fencing, panels and advertising boards.

realcolor®

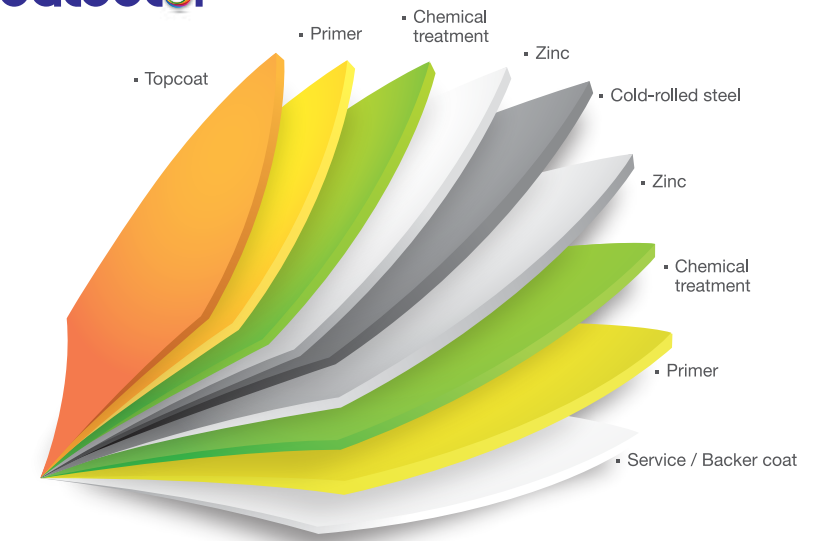

## SECTIONAL VIEW OF COATED STEEL

Pre-painted galvanised steel (PPGI) is a type of colour-coated steel that is generally used in exterior architectural structures and building materials such as roofing, wall cladding, fencing, wall panels and advertising boards.

## TYPICAL PROPERTIES

Test	Result	Method/Remark
T-Bend	5T max	
Pencil Hardness	F-2H	Mitsubishi-uni
Cross-Hatch	100/100	
Solvent Resistance	≥ 100DR	For MEK DR
Erichsen Cupping Test	30mm for SQ, 50mm for CQ	
Reverse Impact	10 Joules	No loss of adhesion
Salt Spray Test	500 hrs	MS 133 : Part H8, Part E6, Part H2 Undercut at scribes lines/ loss of adhesion/blistering, 2-S3/ corrosion at base metal
QUV-A	1000 hrs	Gloss retention > 80% Average colour change not more than 2 dE units (CIELab)

## SPECIFICATIONS

Standard	Steel Grade
MS 2383	01, 250, 280, 320, 350, 550
JIS G3312	CGCH, CGCC, CGC340, CGC400, CGC440, CGC570

Thickness (mm) : 0.176 ~ 0.30 (BMT)  
 Width (mm) : 1,250 (Maximum)  
 Zinc Coating : Z080 (Z08)  
 Top Coat DFT : 10/2  
 MS 2383 Class : C2